

S3200 SnapBack Dock Shelter

Product Specifications



DESIGN HIGHLIGHTS

- Side frames covered with white 18 oz. coated vinyl to transmit natural light into the loading area
- Overlapping layers of fabric provide more wear resistance against the sharp corners of the trailer, extending the life of the shelter
- Raked header permits weather drainage (flat header is used when shelter is protected by a hood or canopy)
- Roll-formed galvanized steel
- Fiberglass stays add stiffness to shelter face curtains

APPLICATION DATA

Door width: _____ ft. _____ in.

Door height: _____ ft. _____ in.

Dock height: _____ ft. _____ in.

Bumper protection*: _____ in.

(*Includes bumper projection and any building wall/foundation offset or cantilever)

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.

Height: _____ Max. _____ Min.

Length: _____ Max. _____ Min.

Hydraulic tailgate: Yes No

Rear step section: Yes No

Tailgate/step section size: _____ in

Yard jockeys: Yes No

PROJECT INFORMATION

JOB NAME _____

ADDRESS _____

GENERAL CONTRACTOR _____

DISTRIBUTOR _____

QUANTITY _____


CERTIFIED FOR CONSTRUCTION

BY _____

COMPANY _____

ADDRESS _____

DATE _____

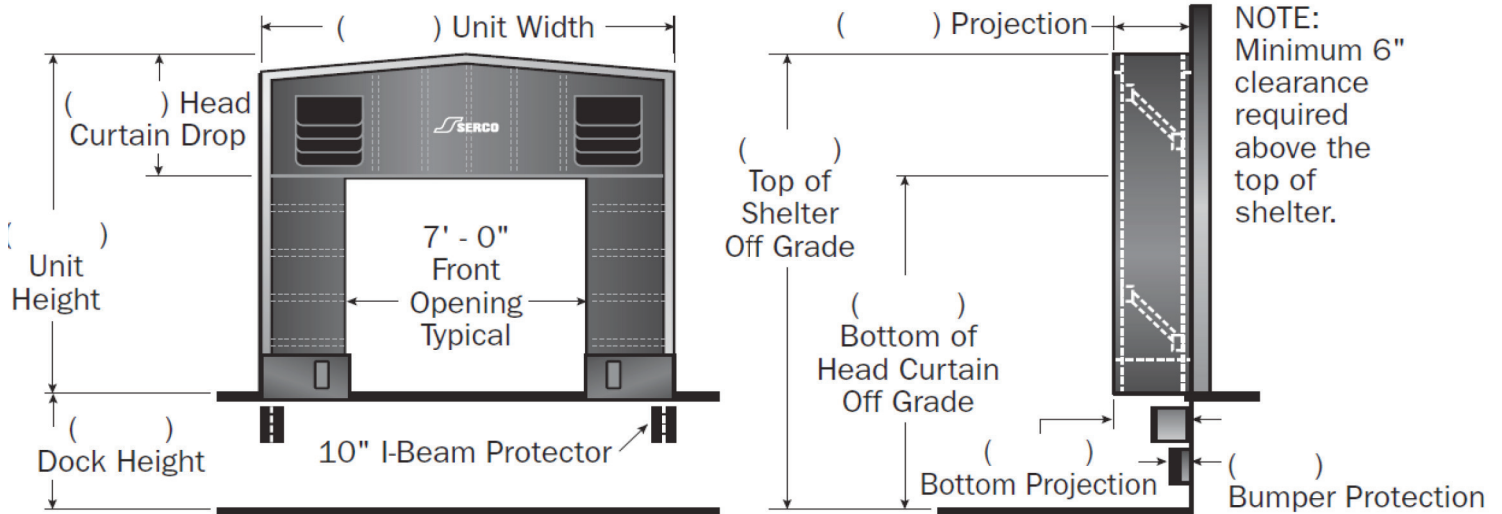

Quantity _____ Drive Approach: Level Incline Decline _____ % of grade

Building Wall Structure: Metal Other

Unit Width: 11'6" 12'

Unit Height: 11' 11'6" 12' 12'6"

Head Member Style: Raked Flat 45 °

Curtain Material: 22 oz. vinyl 40 oz. vinyl XL-100

Color: Black Tan Brown Blue Green

Head Curtain Drop: 30" 36" 42" 48" 54"

Tapered Projection Options: 18" top / 24" bottom 24" top / 30" bottom 24" top / 18" bottom 30" top / 24" bottom

Non-Tapered Projection Options: 18" 24" 30"

Options: Door numbers Pull Rope Assy Full length guide stripes

*Note: Consult factory for blackout application assistance.
 *Conversions: To convert measurements to metric, see formulas below:
 Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)
 Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)



Serco
 1612 Hutton Drive, Suite 140
 Carrollton, TX 75006
 800.933.4834
 www.sercodockproducts.com